



# BUILDING & HARDWARE DISTRIBUTOR IN AUSTRALIA

- (+61) 45 983 1963
- 86A Southern Cross Circle, Ocean Reef
- Perth Western Australia
- [info@bhdaustralia.com](mailto:info@bhdaustralia.com)

WWW.BHDAUSTRALIA.COM



## CR80 outdoor aluminum blinds catalog



## Characteristic:

Sun shade, anti-theft, dimmer, privacy

Ascent and descent blades is retractable and rotated which makes window lighting, ventilate and transparent.

The whole system passed six outdoor tests like corrosion resistance, aging resistance, wind resistance, waterproof, friction and solarization

Service life: 10 years by normal use

Wind resistance : 8 degree

## Two types of guiding ways

1. steel wire guide suitable for the place inconvenient and no space to fix side rail
2. sidetrack guide




## Blades type

Sizes :80mm            Standard color: dark Grey ,brown ,silver

Blade specification: width 80mm thickness 0.45mm, gram weight 95- 110g/m

Blade rotation degree: 0-90°

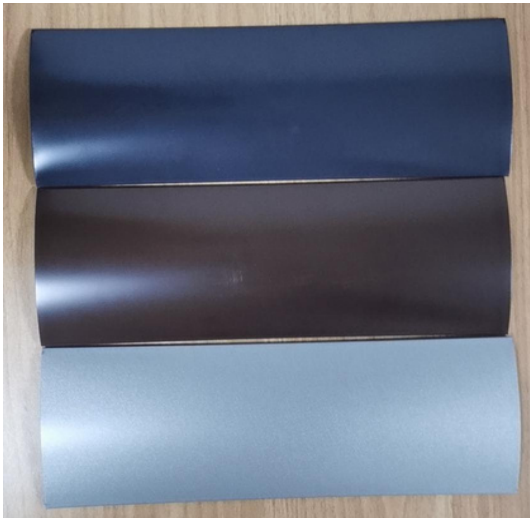


CR80

The blades are aluminium alloy roll forming and CR blade means rolling edge which greatly enhance the firmness and resistance to strong winds.

C blade means non-rolling edge which is widely use in respiratory curtain walls.


## Excellent Material Advanced Craft

- ❑ **Blade Material:** High grade aluminium magnesium silicon alloy, the top level of the industry.
  - Good elasticity, high strength, stable shape not changeable.
  - Blades don't contain the harmful heavy metals such as chromium, using safety.
- ❑ **Aluminum coil coating:** double face via special enamel paint process, three times coating and three times baking
  - Uniform color, good color fastness, bright and durable
  - Coating high stiffness, strong adhesion, good lubrication, anti corrosive and moisture proof.
- ❑ **Pinhole blade:** perforated by laser technology
  - Fully ensure the uniform perforated, cover the sunlight while see the outside scenery.

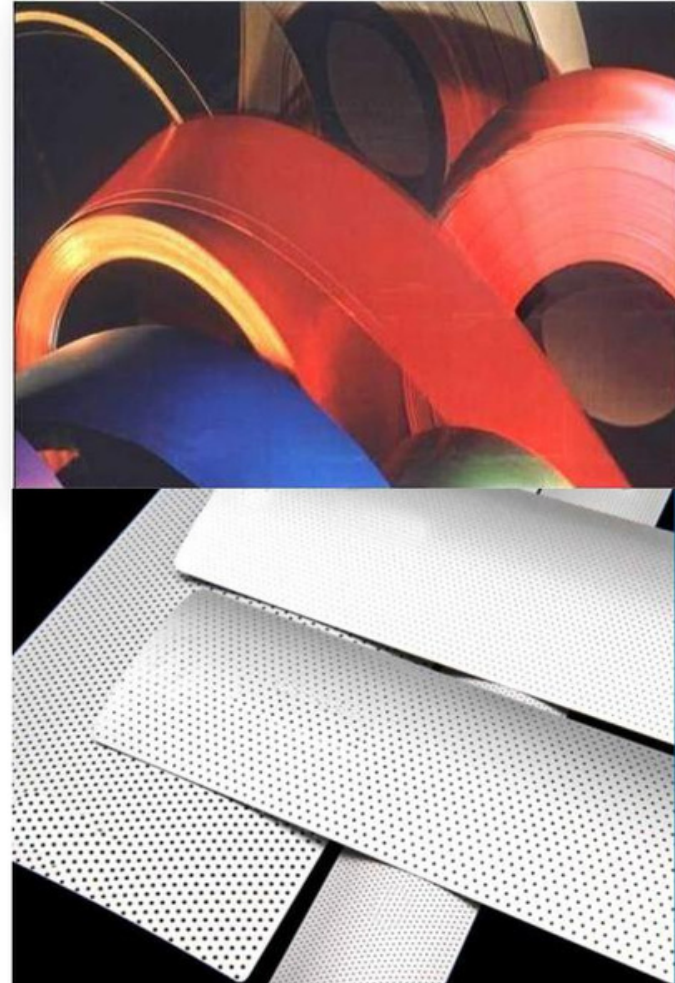

Rope ladder: double ladder structure, polyester fiber material, UV and weather resistant treatment.

Ascension drawstring: imported from Switzerland, polyester fiber material, UV resistance and weather resistance, then contract processing, low elongation and shrinkage, the service life of 100000 times, the minimum pulling force of 700 N, 6 \* 0.33 mm.

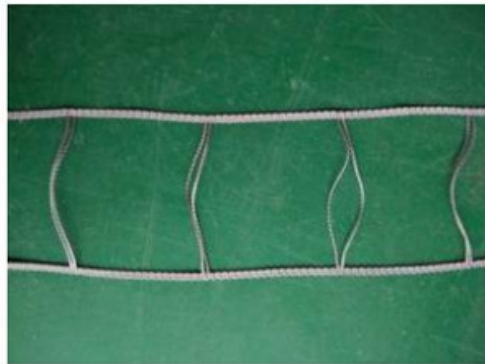

Guide wire specifications : 2 mm and 3 mm diameter of the stainless steel wire




Shaft specification: 7 \* 7 mm / 12 \* 12 mm  
Adopt the hot dip galvanized steel, not rust for using long time

# Control ways

## 1. Motorized control by remote

Motor brand :ELERO which import from Germany ,voltage only support 230V

Remote and receiversystem:AOKbrand

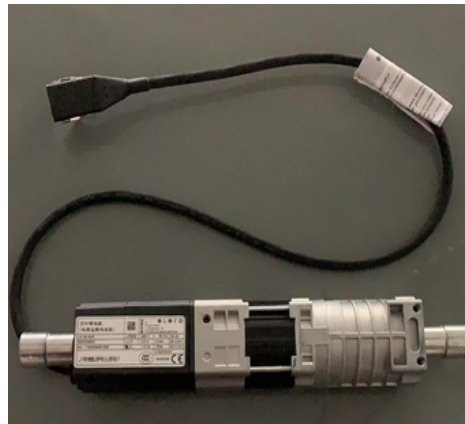

## 2. manual control by chain



Manually pull beads